


SPETEC® PU F1000



FLEXIBLE, MEDIUM-LOW VISCOSITY, INJECTION RESIN FOR SEALING LEAKING JOINTS AND CRACKS.

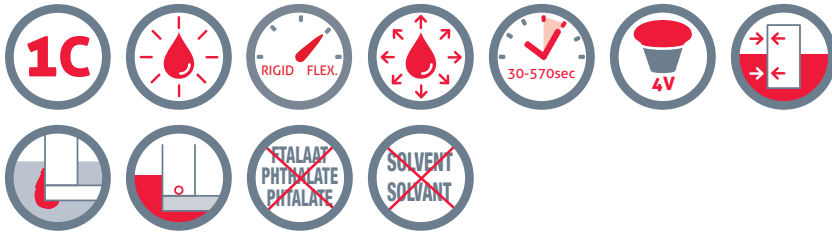

DESCRIPTION

Solvent and phthalate free, water reactive, hydrophobic, closed cell, medium low viscosity, shrink-free, flexible, one-component polyurethane injection resin designed to shut off water leaks. In contact with water the SPETEC® PU F1000 will expand and set as a permanent flexible water seal inside the crack or joint.

ADVANTAGES

- One component.
- Different reaction times are possible by adjusting the percentage of the SPETEC® F1000 Acc accelerator. The closed-cell structure of cured polyurethane ensures permanent flexible sealing of cracks and joints.
- Cured polyurethane is flexible, shrink-free and exhibits good chemical resistance (contact our Technical Service for more information).
- Cured polyurethane is harmless for the environment and resistant to biological attacks.
- WQA drinking water certificate.

FIELD OF APPLICATION

- Shut off water leaks in concrete, brickwork and sewers where movement and settlement may occur.
- Injecting joints, cracks and microcracks between 0,5 en 4 mm.
- Water cut-off of water leaks in foundations such as diaphragm walls, piling sheets and secant piles.
- Sealing water-carrying cracks and joints in tunnel segments.
- Curtain grouting behind tunnel, concrete, brickwork and sewer walls.
- Injection of water cut-off membranes and liners in tunnels.

APPLICATION

Note : the following is a typical application description. In case of other jobsite parameters, please contact our technical department.

PRELIMINARY ANALYSES

For leaking joints, check how the joint runs into the construction. Injection holes have to be drilled into the joint.
For leaking cracks, drill the injection holes in a zig-zag pattern around the crack to make sure that the injection hole intersects with the crack.



REQUIRED TOOLS

Drill and drill bits of appropriate diameter and length.
Packers of appropriate diameter and length.
Injection pump; manual, pneumatic or electric.

PREPARATION OF THE SUBSTRATE

Drill under an angle of 45° into the crack or joint. Ideally the injection hole should intersect the joint or crack about half way the thickness of the wall or slab.
Blow the dust out of the injection hole.
Fix a packer of the right diameter into the injection hole.

PREPARATION OF THE PRODUCT

Read the technical and safety data sheets prior to commencement of the injection works.
Vigorously shake the accelerator SPETEC® F1000 Acc before use and add the required quantity (2-10%) into the SPETEC® PU F1000 resin. Mix the accelerator homogeneously into the resin and protect against moisture and rain to prevent premature reaction.

PREPARATION OF THE EQUIPMENT

Depending on the application, injection can be carried out using a hand pump, pneumatic pump or electric pump.
Preferably use a separate pump for injection of water and polyurethane resin.
Check if the pump is working properly.
Prior to injection, the pump must be flushed with SPETEC® PUMP CLEANER and be completely free of water to prevent pump blockage.

INJECTION

Start the injection at the first packer; for vertical joints or cracks this is usually the lowest packer.
Do not over pressurise while injecting; the correct injection pressure is the pressure that allows to resin to flow into the crack or joint. Avoid injecting at pressures of more than 100 bars.
If unreacted resin comes out of the joint or crack, stop the injection and move on to the next packer.
After the last injection of resin into the packer, shoot a little bit of water into the packer in order to make sure that the last injected resin will react as well.
Only catalyse the resin you will use within the next few hours.
Do not let resin stay in the pump overnight.

FINISHING

After injection, remove the packers from the concrete and fill the holes with a fast setting cement or any other appropriate filler material.

APPLICATION CONDITIONS

Avoid injecting by temperatures below -20°C. In extreme cold conditions it is recommended to warm the resin and catalyst.

CLEANING AND MAINTENANCE

After the injection, clean the pump with SPETEC® PUMP CLEANER. If the pump will not be used for several days, put oil into the pump and leave it there until the next usage. Never rinse the pump with water.

COMPLIMENTARY PRODUCTS

SPETEC® PUMP CLEANER
SPETEC® PACKERS & ACCESSORIES
CERMIPLUG

ADVICE / FOCAL POINTS

Water must always be present during the injection of SPETEC® PU F1000 as it is a water-reactive resin.

TECHNICAL DATA

APPEARANCE - COMPOSITION

SPETEC® PU F1000, uncured (Appearance: white liquid)		
Viscosity at 25°C	Brookfield SPIV / 200 tr	±550 mPa.s
Density	EN ISO 2811-1	±1.026 kg/dm ³

SPETEC® F1000 Acc, Accelerator for SPETEC® PU F1000 (Appearance: black liquid)		
Viscosity at 25°C	Brookfield SPIII / 200 tr	±12 mPa.s
Flash point		>163°C
Density	EN ISO 2811-1	±0.93 kg/dm ³

REACTION TIMES

SPETEC® F1000 Acc	5°C		15°C		25°C		Expansie
	Start	End	Start	End	Start	End	
2	240"	570"	180"	400"	70"	180"	4V
6	125"	210"	70"	180"	45"	110"	4V
10	80"	145"	45"	95"	30"	75"	4V

CONSUMPTION

Consumption has to be assessed on site and is influenced by the amount of water leaking, thickness of the concrete slab or wall, presence of voids in and around the concrete etc.

TECHNICAL DATA

SPETEC® PU F1000 + Accelerator cured		
Tensile strength	EN ISO 527	±2 MPa
Elongation at break	EN ISO 527	100%
Density	EN ISO 2811-1	±1 kg/dm ³

CHEMICAL RESISTANCES

Cured polyurethane exhibits good chemical resistance, is harmless for the environment and resistant to biological attack. (contact our Technical Service for more information)

REFERENCE DOCUMENTS

WQA potable water approval.

PACKAGING

SPETEC® PU F1000	20 kg	Pails	24 pails/pallet
	200 kg	Steel drums	4 drums/pallet
SPETEC® F1000 Acc	2 kg	Plastic Bottles	4 bottles/box 44 boxes/pallet
	20 kg	Metal Cans	24 pails/pallet

STORAGE AND SHELF LIFE

SPETEC® PU F1000 is moisture sensitive and should be stored in a dry area between 5°C and 30°C.

Shelf life of the resin: 24 months in original packaging.

Shelf life of the accelerator: 24 months in original packaging

Once opened, containers should be used as soon as possible.

SAFETY PRECAUTIONS

Avoid contact with eyes and skin, always use personal protective equipment in compliance with local regulations.

Read the relevant Material Safety Data Sheet before use.

Material Safety Data Sheets are available on www.spetec.com

When in doubt contact SPETEC® Technical Service.

Note: the information and recommendations provided in this technical data sheet is given in good faith and based on laboratory test and on the job experience of the manufacturer. In practice, site conditions and substrates might be such that the manufacturer cannot warrant the fitness for each individual purpose. The user of the product must test the product for its intended use and ascertain himself that the product will work under the specific conditions of the jobsite. The manufacturer does not accept any liability based on the content of the technical data sheet. The user must verify that he holds the latest version of the technical data sheet. The manufacturer reserves the right to change the properties of the product. Products must be properly stored, handled and applied in line with manufacturer's recommendations. Version 1.0 Date: 2 August 2018 4:48 PM